Proposed Warehouse Improvement Plan for the Government of Bangladesh, Directorate General of Family Planning

Maurice Juma

April 2013



This report is made possible by the generous support of the American people through the US Agency for International Development (USAID), under the terms of cooperative agreement number AID-OAA-A-11-00021. The contents are the responsibility of Management Sciences for Health and do not necessarily reflect the views of USAID or the United States Government.

About SIAPS

The goal of the Systems for Improved Access to Pharmaceuticals and Services (SIAPS) Program is to assure the availability of quality pharmaceutical products and effective pharmaceutical services to achieve desired health outcomes. Toward this end, the SIAPS result areas include improving governance, building capacity for pharmaceutical management and services, addressing information needed for decision-making in the pharmaceutical sector, strengthening financing strategies and mechanisms to improve access to medicines, and increasing quality pharmaceutical services.

Recommended Citation

This report may be reproduced if credit is given to SIAPS. Please use the following citation.

Juma, M. 2013. *Proposed Warehouse Improvement Plan for the Government of Bangladesh, Directorate General of Family Planning*. Submitted to the US Agency for International Development by the Systems for Improved Access to Pharmaceuticals and Services (SIAPS) Program. Arlington, VA: Management Sciences for Health.

Systems for Improved Access to Pharmaceuticals and Services
Center for Pharmaceutical Management
Management Sciences for Health
4301 North Fairfax Drive, Suite 400
Arlington, VA 22203 USA
Telephone: 703.524.6575

Fax: 703.524.7898 E-mail: siaps@msh.org Website: www.siapsprogram.org

CONTENTS

Abbreviations and Acronyms	v
Acknowledgments	vi
Executive Summary	vii
Road Map	vii
Background	1
Methodology and Proposed Approach	3
Implementing the Warehouse Improvement Plan	3
An All-Inclusive Selection Process: Custom DGFP Catalogue	4
The Concept of Boltless and Adjustable Shelving	4
Warehouse Improvement Implementation Lessons	6
Floor Plans	7
Procurement	7
Consolidated Observations: Central Warehouse, Chittagong, Khulna, and Tangail	9
Short-Term Recommendations	9
Medium-Term Recommendations	11
Long-Term Recommendations	12
Shelving and Racking	14
Pallet Racking	14
Drive-in Racking	14
Light-to-Medium-Duty Racking	14
Decked Racking	14
Handling Equipment: Trolleys, Ladders, Pallets, Lifting, Packaging	17
Trolleys	17
Ladders	19
Pallets	20
Lifting	21
Packaging	23
Safety, Health, and Staff Welfare	25
Cleaning	25
Safety	29
Protective Wear	31
Other	33

Conclusion	36
References	37
Appendix A1: Floor Plan for Central Warehouse	38
Appendix A2: Floor Plan for Central Warehouse Repackaging	39
Appendix A3: Floor Plan for Central Warehouse Garage	41
Appendix B: Floor Plan for Chittagong Regional Warehouse	42
Appendix C1: Floor Plan for Khulna Regional Warehouse	44
Appendix C2: Floor Plan for Khulna Regional Warehouse (Low Temperature)	45
Appendix D: Floor Plan for Tangail Regional Warehouse	46
Appendix E: Floor Plan for Boalkhali Warehouse	47
Appendix F: Floor Plan for Shaturia Warehouse	49
Appendix G: Summary of Shelving and Handling Equipment	51
Appendix H: Sites Visited and Key Personnel Contacted	53

ABBREVIATIONS AND ACRONYMS

DGFP Directorate General of Family Planning

MoHFW Ministry of Health and Family Welfare

MSH Management Sciences for Health

SIAPS Systems for Improved Access to Pharmaceuticals and Services

SPS Strengthening Pharmaceutical Systems

UIMS Upazila Inventory Management System

WIMS Warehouse Inventory Management System

WIP Warehouse Improvement Plan

ACKNOWLEDGMENTS

I would like to thank the Director General of Family Planning for the Ministry of Health and Family Welfare of Bangladesh. His keen interest was demonstrated by making himself available on more than one occasion. He shared his enthusiasm by ensuring active participation from all directors and senior staff who at his invitation attended the debriefing session.

The preparations to the Warehouse Implementation Plan have been made possible with the valuable guidance and support of Dr. Zubayer Hussain, Country Director, Systems for Improved Access to Pharmaceuticals and Services (SIAPS) program implemented by Management Sciences for Health (MSH), Bangladesh. A special thanks to Mr. Md. Abdullah, Senior Technical Adviser–Logistics, who provided daily logistics support and more importantly shared his many years of experience in logistics and past assessments of the Directorate General of Family Planning to ensure a practical and focused approach.

I also thank Mr. Md. Saiful Islam, Additional Director–Central Warehouse; Mr. Md. Azim Uddin. MSH Technical Adviser–Logistics–Central Warehouse; Mr. Abu Shah Jamal Molla, MSH Technical Adviser–Logistics Bogra; Mr. Mohammed Hossain, MSH Technical Adviser–Logistics Regional Warehouse, Khulna; Mr. Mian Abdul Kader, Technical Adviser–Logistics Regional Warehouse Chittagong; Mr. Syed Ahammed Mostafa Al-min, MSH Technical Adviser–Logistics Sylhet; Mr. Abdullah Imam Khan, Senior Technical Adviser–Procurement; Mr. Mahmudul Islam, Managing Director Softworks Ltd.

I would also like to acknowledge Gabriel Daniel, Reem Ghoneim, Wonder Goredema and Mavere Tukai for technical review and inputs.

The source for all figures in this document is Linvar Storage Systems 2010/11 catalogue¹.

-

¹ Linvar Storage Systems; http://www.linvar.co.za/

EXECUTIVE SUMMARY

The United States Agency for International development's Systems for Improved Access to Pharmaceuticals and Services (SIAPS) Program in Bangladesh, funded by the US Agency for International Development (USAID) and implemented by Management Sciences for Health (MSH), is working toward improving access to and availability of quality pharmaceuticals and effective pharmaceutical services. This activity falls under the main objective of strengthening the supply chain management systems of the Ministry of Health and Family Welfare (MoHFW) and component procurement entities with a particular focus on strengthening the logistics and supply chain management systems of the warehousing systems of the Directorate General of Family Planning (DGFP). This assignment focuses on further gains for effective and efficient warehousing and distribution system.

Although the assignment focused on the assessment of the warehouse conditions, facilities, and systems for the central warehouse and three regional warehouses of Chittagong, Khulna, and Tangail, Ghior, Sadar, Shaturia, Boalkhali, and Rupsha were also assessed because they represent a cross section of the more than 200 smaller storage facilities.

The warehouses have been operating with minimum structures in the absence of floor plans, adequate shelving, and handling equipment. Consequently, the Warehouse Inventory Management System (WIMS) has not been challenged. The roadmap recommends that these processes advancing increased use of WIMS be reactivated as phase 5, the last of the planned implementation phases for the Warehouse Improvement Plan (WIP).

The key tool for the WIP is a detailed floor plan for every warehouse and storeroom under review. A detailed floor plan has been prepared following the visits to the facilities indicated.

To facilitate an all-inclusive decision-making process, SIAPS created a comprehensive equipment catalogue for shelving and handling supported with specifications that will assist clarity and fair competition during the procurement process.

The concept of boltless shelving has been introduced. This is an industrial bulk shelving system; a departure from the traditional bolted or welded steel shelving. The assembly process requires minimum hardware. It is easy to assemble and just as easy to disassemble and provides much-needed flexibility during use.

Road Map

Phase 1 deliverables for this assignment—

- Design floor plans, 11
- Design lighting plans
- Design catalogue
- Identify and select shelving

- Identify and select handling equipment
- Identify and select safety and protective wear
- Prepare specifications to assist procurement
- Highlight required infrastructure repairs and improvements
- Assess temperature control facilities
- Assess WIMS use and opportunities for integration with Upazila Inventory Management System (UIMS) and web-based software
- Provide a roadmap and a basis for increased partnership through clear allocation of roles and responsibilities between the DGFP and SIAPS

Phase 2—next 3 to 5 weeks

• Assist procurement with requests for clarifications

Phase3—next 5 to 10 weeks

• Supplier inspection: validate supplier capacity, quality, and product availability of selected shelving and handling equipment as detailed herein

Phase 4—next 10 to 30 weeks

- Prepare temporary storage for all shelving and equipment
- Prepare all warehouse floors for installation while ensuring continued operations
- Supervise installation
- Supervise product allocation and use of new shelving

Phase 5—next 30 to 35 weeks

• Implement increased WIMS functions for warehouse management and inventory control

Quick Wins—next 4 to 10 weeks

DGFP and SIAPS partnership is strengthened through ownership of roles and responsibilities to enable visible and practical results in the next four months.

DGFP roles and responsibilities are defined for further implementation of the WIP—

- Disposal of all old vehicles, irreparable handling equipment, old pallets, expired drugs and medical supplies
- Preparation of temporary storage and assembly space for new shelving and handling equipment
- Change to more compliant storage and handling of oxygen

- Distribute excess stationery and intravenous stands from central warehouse and rationalize future stationery procurements
- Devise a vendor compliance program that defines agreed delivery schedules in line with demand and distribution throughput

SIAPS roles and responsibilities—

- Procure and install shelving
- Procure and install lighting plan
- Procure and distribute handling equipment to reduce workload
- Procure and install signage to promote safety
- Procure and distribute protective wear to promote safety and staff welfare
- Procure and install overhead fans
- Procure and install extractor fans
- Procure and install air conditioners
- Improve office layouts, furniture for improved working conditions

Table 1: Summary of Recommendations

Sequence	Focus	Recommendation	Ownership
Short term		Dispose of—	
	Disposal	 All old vehicles Expired medicines and medical supplies Irreparable handling equipment Old pallets Old tires 	DGFP
		Distribute as much required stationery to facilities as possible Distribute all medical equipment, IV stands, etc.	- DGFP
	Improved space use; excess stationery and equipment	Review current supplier delivery practices to reduce congestion	DGFP/MSH
		Review quantification and procurement of stationery Decide on future use for the garage space at Central Warehouse	DGFP
	Oxygen storage and handling	Immediately change current practices by implementing consultant's guidelines on safe handling	DGFP
	Warehouse housekeeping	Dust all storage spaces; mop and scrub floors	DGFP
		Paint warehouse interiors and exteriors	DGFP/MSH

Sequence	Focus	Recommendation	Ownership
Medium term	Backup power	Consider solar or diesel generator backup	DGFP/MSH
		Review and fill staff vacancies, cleaners, loaders etc.	DGFP
	Software	Expand web-based software coverage	14011
		Accelerate upgrade and review integration opportunities	- MSH
	WIMS	Standardize all product codes in all facilities	
		Remove all inactive items in the WIMS	DGFP/MSH
		Activate as many functions as possible following the installation of shelving and implementation of recommended inventory practices	
		Improve report functions to include ABC analysis for both consumption and expenditure	Consultant/MSH
	Shelving installation preparation	Draw shelf positions in all improving warehouses and stores	Consultant/TAs/ DGFP
	Shelving	Procure and install	MSH/consultant
	Handling equipment; reduced workload	Procure and distribute	MSH/consultant/
	Warehouse lighting	Procure and install to consultant's lighting plans	DGFP
		Improve natural lighting through the roof	DGFP/MSH
	Warehouse identification	Procure and install signage	MSH/consultant
		Procure and allocate protective wear	
	Staff welfare and safety	Procure and allocate new furniture	MSH/DGFP
		Renovate and improve office space and temperature	-
Long term	Warehouse expansion	Following implementation of review warehouse improvement plans, throughput velocity, receipt, storage, fulfillment, and dispatch functions	DGFP/MSH/ consultant
	Systems improvements	Review WIMS capacity and consider integration or switch to new software	MSH/consultant
		Integrate web-based with WIMS	MSH / DGFP

BACKGROUND

Bangladesh Ministry of Health and Family Welfare (MOHFW)'s, Directorate General of Family Planning (DGFP) is responsible for providing reproductive health/family planning services and products. With the increased volume of commodities, as a result of strengthened procurement and bulk delivery of commodities to the central warehouse in recent years, there is a need for a well-designed plan to improve warehousing and distribution.

The United States Agency for International Development's Systems for Improved Access to Pharmaceuticals and Services (USAID/SIAPS), managed by Management Sciences for Health (MSH), is supporting DGFP to improve procurement and supply management of family planning in Bangladesh. In collaboration with SIAPS, the MOHFW identified a need to review the national warehouse management system and recommend improvements in the following areas:

- Cost effectiveness of storage of family planning commodities- assessment of the DGFP storage space and removal of obsolete products (medicines, supplies, equipment, stationeries and other hospital accessories), as well as risks associated with these products.
- Commodity and warehouse staff safety a good warehouse and distribution process address the importance of effective storage management and warehousing for the safety of medicines and warehouse staff (concerning staff movement within the warehouses). SIAPS assesses and addresses any safety issues relating to the DGFP warehouse as far as good logistics management is concerned.
- Compliance with regulatory requirements present a well-documented DGFP report and situational analysis that addresses all storage requirements; situation, strengths, gaps and possible ways to meet all regulatory standards for a good logistics management of family planning commodities
- Clients satisfaction a good warehousing system improves client satisfaction by providing timely stock updates, maintaining quality of medicines and timely delivery due to good logistics management systems
- Technology synchronization DGFP has been very successful in implementing the Upazila Information and Warehouse Management Systems (WMS); in addition the Supply Chain Information Portal (SCIP) has demonstrated that DGFP can rely on modern technology to improve family planning logistics management. The assessment will help in preparing DGFP to synchronize the UIMS, WMS and the warehouses business processes e.g. ERP, and vehicles management systems to improve DGFP performance
- Managing workload a good warehouse management system reduces unnecessary workload
- Optimization of distribution

Tastages reduction – there is a risk of expiries in a highly congested and poorly designed rehouse, because some of the newly received products may be wrongly placed and get mixed with expired products.	ed.

METHODOLOGY AND PROPOSED APPROACH

The assessment of warehousing conditions was conducted across facilities in Chittagong, Khulna, Tangail, Ghior, Sadar, Shaturia, Boalkhali, and Rupsha. This sample of facilities was selected in order to represent a cross section of over 200 storage facilities in Bangladesh.

The tools used for implementing the Warehouse Improvement Plan (WIP) are the detailed floor plans for warehouses and storerooms reviewed. The assessment included review of warehousing structures, shelving, and handling of equipment at the sites.

Implementing the Warehouse Improvement Plan

The WIP requires a clear understanding of responsibilities. Complete delivery of services is achieved after shelving and handling equipment are in use in line with the inventory control disciplines introduced by the floor plans, such as use of warehouse identification marks, aisles, placement of fire-fighting equipment, etc. Full implementation of the WIP requires the following action—

Phase 1

- Assess warehousing and systems through site visits and consultations
- Design floor plans
- Design lighting plans
- Identify and select shelving
- Identify and select handling equipment promoting reduced workload
- Identify and select protective equipment promoting safety and hygiene and therefore improved staff welfare
- Design shelving and handling equipment catalogue to suit the Bangladesh environment and thus facilitating easy comprehension of the proposal by all stakeholders
- Prepare specifications
- Prepare procurement guidelines
- Prepare a roadmap and quick wins for next six months

Phase 2

• Assist the procurement team with requests for clarifications from bidders

Phase 3

 Validate supplier capacity and quality of selected shelving and handling equipment by visiting the selected suppliers (see below)

Phase 4

- Procure installation consumables: yellow reflective paint, brushes, chalk strings, tapes, markers, A4, five sheet boards for bay marking, glues, etc.
- Map out floor plans on warehouse floors in preparation for installation
- Assist in inspection and acceptance of supplied shelving and handling equipment during delivery to DGFP and MSH
- Supervise installation of shelving
- Implement the floor plan and strengthening of management reports

An All-Inclusive Selection Process: Custom DGFP Catalogue

Based on warehouse visits, the consultant prepared a DGFP custom catalogue supported with pictures for easy comprehension; identification; appreciation of the intended use; and encouraging fair participation in the decision making by all stakeholders. The catalogue was distributed to all technical advisers and presented to warehouse staff during site visits. The catalogue covers boltless shelving and racking; fencing; mezzanine floors; conveyor systems; trolleys; ladders; pallets; lifting equipment; work benches; cleaning equipment; safety equipment; office equipment; and temperature control equipment. The catalogue also provides an opportunity for easy prioritization in the event of insufficient funding.

The Concept of Boltless and Adjustable Shelving

Boltless shelving consists of the rails and upright posts and the unique "buttons" on the shelf rails that snap directly into the postholes. Boltless shelving is a general-purpose storage solution for all kinds of products and environments. This industrial bulk shelving system is a departure from the traditional bolted or welded steel shelving. The assembling process requires minimum hardware. It is easy to assemble and just as easy to disassemble and provides flexibility during use.

This proposal features two types of boltless shelving: long-span boltless shelving and regular boltless shelving. Long span is a little more ragged and offers higher weight capacities and longer span shelves. The regular boltless shelving is usually shorter and designed to support lower capacities but remains a better choice over the traditional welded or bolted shelving.

The DGFP warehousing environment requires an improvement plan that functions with this shelving model. During the procurement of equipment process, bidders should provide full specifications of the materials tendered.



Uprights, consisting of full end frames, uprights, diagonals, and horizontals, bolton feet, and all nuts and bolts required to build end frames.

Figure 1: The frame: two uprights and reinforcements



Specifications:

- Length: 3,000mm
- Load: 2,000kg
- Heavy duty

Note clips, boltless

Figure 2: The beams



Figure 3: The deck

Specifications

- 50mm pine
- 1,320mm × 1,000mm × 50mm
- Self-locking



Specifications Height: 500mm

Figure 4: Frame protectors



SpecificationsLength: 210 mmHeight: 50 mm

Figure 5: Pedestrian safety, racking barriers

Warehouse Improvement Implementation Lessons

Many assessments have recommended the critical need for practical delivery of visible results. Based on practical experiences of similar projects in the past two years, reference is made to lessons learned in key areas of planning and implementation:

- Important to implement a comprehensive management approach; from design to use.
- Important to own/manage the designs
- Improve process of projecting budgets
- Improve warehouse layouts
- Improve floor plans
- Select correct shelving options
- Select correct handling equipment
- Ensure supplier and equipment inspection
- Ensure adequate preparations for delivery of shelving and equipment
- Increase and improve supervision

- Increase and improve consultations
- Ensure regular stakeholder updates

Floor Plans

SIAPS prepared 11 warehouse floor plans taking into account as many challenges as possible and contributions from stakeholders. This report covers the Central, Chittagong, Boalkhali, Khulna, Ruspha, Ghoir, Shaturia, Tangail, and Sadar Tangail warehouse and storerooms. The floor plans are the foundation and basis for all aspects of the suggested improvements: space use, shelving selection, handling equipment selection, temperature control, product allocation, computerization, etc. The floor plans are also the basis for the procurement of all shelving. All floor plans must be included in the bidding documents. Changes should not be made without the consultation of supervisors and stakeholders; further emphasizing the importance of ownership and installation supervision. All floor plans are attached as appendixes.

Procurement

Specifications

The procurement team is encouraged to extract from this report specifications for all approved shelving and handling equipment for inclusion in the bidding document to facilitate clarity. Every effort has been made not to advance any specific brand names or suppliers.

Request for Clarification

The proposal is a combination of multiple factors. Requests for clarification must all be in writing. All clarifications must be shared with all bidders to ensure fair competition.

Shelving and Equipment Validation

Despite the best care taken in the selection process, a small team should visit the source of supply to ensure a perfect match to specifications and quality of materials used. This visit also provides an opportunity for assessment of supplier capacity and assurances regarding product availability. The market is known to attempt to pass off reconditioned equipment for new. Because of the magnitude of this project, leaving inspection and validation for receipt of delivery should not be risked. Official catalogue manufacturers' codes must be confirmed and quoted in all documentation. The directorate and procurement team may also wish to take advantage of experience acquired during the recent procurement of 3-ton pallet lift jacks and air conditioners. The inspection team should consist of a representative from MSH, a representative of the DGFP, and the project consultant.

Warranty

At minimum all equipment should be supported by a one-year warranty.

Shelving and Handling Equipment Delivery, Handling, and Storage

Once the approvals to procure are given, the consultant should work with DGFP and MSH to develop a phased delivery plan. The volumes expected will otherwise overwhelm the limited existing temporary storage space, leading to possible damage before shelving is installed. The consultant has identified all garages and warehouse-covered spaces as the only facility for temporary storage and assembly of equipment. In preparation, it is critical that all old vehicles, tires, irreparable handling equipment, and old pallets be disposed of. Installation must ensure continued logistics operations during the project implementation.

Installation and Supervision

The procurement process should include the cost of installation by the supplying vendor. This process gives the supplier an opportunity to ensure that the intended use is in line with capacities of the equipment, further validating the warranty. Compliance with floor plans is ensured through the consultant's supervision of the installation. Shelving can be installed in all four warehouses within three months from the date of equipment delivery as long as full support from local staff is assured.

CONSOLIDATED OBSERVATIONS: CENTRAL WAREHOUSE, CHITTAGONG, KHULNA, AND TANGAIL

When a warehouse is over capacity, costs are rising, service levels struggling, the layout and lighting poor, and handling equipment inadequate, it is natural to assume that a larger and better planned warehouse will go a long way to solve the issues. In many ways, this is the case with the central warehouse. The demand has exceeded available space. However, the approach needs to examine root causes and establish both short- and long-term solutions.

Short-Term Recommendations

The most immediate need is to deal with some primary causes of the present status and develop an immediate action plan for the reduction or elimination of high-risk items, disposal, warehouse and storage space reconfiguration, additional shelving identification and selection, additional handling equipment identification and selection, and product throughput from suppliers.

High-Risk Reduction or Elimination

Oxygen cylinders are the highest risk to the entire central warehouse. Their handling and storage practices are below required compliance levels. The existing stocks have the capability to destroy every available asset, including staff lives in the event of an explosion.

At a minimum, the following checklist should provide easy-to-apply guidelines—

- Oxygen cylinders should be stored in a cool place, away from heating sources.
- Cylinders should be stored in a stable and upright position. Their weight can cause damage when they fall on staff or stock.
- Place a large "No Smoking" sign in the general vicinity of the oxygen cylinders and alert staff to ensure that no one smokes or lights a flame of any sort near the storage area.
- Ensure ample ventilation. Current space has very limited airflow and can be prone to catching fire if any oxygen vents from the cylinders.
- The cylinders should not be stored near oil, grease, or other flammable liquids.

Ideally, oxygen should not be stored at the central warehouse. Negotiations are necessary for a new distribution plan with the supplier to transfer all the noted risks to the supplier. A direct delivery program should be considered in which the supplier makes scheduled visits to facilities and replaces only empty cylinders, adhering to minimum stock levels. This system would ensure demand-driven supply, thereby reducing related risks and providing the much needed additional storage space.

Housekeeping

- Dust and or wash all storage spaces: shelves, cartons, and walls.
- Mop, scrub, and polish floors.
- Paint walls (light cream recommended).

Disposal

Development plans require immediate disposal of the following—

- Redundant stock—old UNICEF donations
- Expired stock
- Old vehicles
- Old tires
- irreparable handling equipment

Distribution

- Allocate and distribute all new medical equipment (IV stands, etc.).
- Allocate and distribute as much stationery as possible.

Improve Space Use

Warehouse and storage space reconfiguration—

- Prepare a new floor plan for shelving to cover all storage spaces: main warehouse, repackaging, and garage.
- Prepare a new lighting plan covering all aisles, receiving areas, and dispatch areas.
- Consider sky-lighting for more natural light.

Identify and Select Additional Shelving

- Evaluate, quantify, and select appropriate heavy-duty shelving—uprights, beams, decks, guards—promoting vertical storage to safely maximize available space.
- Provide detailed specifications to aid the procurement process.
- Provide an estimated budget.
- Recommend procurement guidelines to ensure value for money.

Reduce Workload: Identify and Select Additional Handling Equipment

- Evaluate, select, and quantify appropriate heavy-duty handling equipment: pallets, turntable trolleys, rocker trolleys, eight step ladders, 2.5-ton pallet jacks, heavy-duty packing and wrapping benches, strapping machines, tape dispensers, warehouse scrubber/polishers, manual sweepers, industrial mops, staff support equipment, etc.
- Provide detailed specifications to aid the procurement process.
- Recommend procurement guidelines to ensure value for money.
- Prepare an estimated budget for resource assessment.

Improve Delivery Practices

Take full advantage of the buying power of the DGFP and ensure refined contracts, which work with a demand-driven phased delivery plan with all suppliers. Current practices imply very weak purchaser and supplier agreements.

A vendor compliance program is urgently needed that defines detailed expectations and specifications required. The program should include corrective processes to be used and consequences for noncompliance. The processes begin at the warehouse's receiving door; every function, from put-away to shipping, is affected in some way by vendors' actions.

Infrastructure

Create and implement warehouse preventive maintenance plans. Khulna's floor is sinking; Chittagong's office front and walls are sinking and cracking; Shaturia's walls are cracking; office space needs remodeling and furniture needs to be replaced. All structures require a fresh coat of paint and major floor repairs to the Central Warehouse, Khulna, and Chittagong.

Medium-Term Recommendations

- Upgrade or consider a more current software system.
- Procure and install shelving.
- Procure and install overhead fans.
- Procure and install extractor fans.
- Procure and distribute handling equipment.
- Procure and install warehouse lighting.
- Reintroduce bin location for easy identification of stock and improved picking practices.
- Reintroduce identification signage, bay labels, bin locations, etc.
- Mark all access areas with yellow industrial reflective paint.

Long-Term Recommendations

Facilities

The current warehousing, office, and staff welfare facilities are overwhelmed and therefore no longer in line with the concept of central warehousing in the case of the Central Warehouse. The available total space requires careful analysis for long-term expansion plans to optimize site potential. The design methodology should begin with a review of the existing operations and the gathering of transactional data for growth in inventory, throughput velocity, receipt, storage, fulfillment, dispatch, and costs incurred in the process. This is the premise for a sanity check presenting an opportunity for benchmarking against industry standards.

The expert integrated and holistic approach should take into account the following goals, technical requirements, and constraints—

- Capital
- Information technology systems
- Timing
- Site / building
- Temporary logistics
- Cost-effectiveness
- Accessibility and location—a key driver
- Functional operations: receiving, storage, shipping, aisle spaces, relevant handling equipment, picking, packing, temperature control, energy-efficient lighting, fleet management, staff welfare, office space
- Security
- Safety: upright and bay guards
- Sustainability: appropriate ventilation
- Space requirements based on improved links between procurement and logistics, reflecting planned and controlled deliveries in proportion to dispatched volumes

Software Review

The web-based logistics management information system has achieved great success and truly presents an increased level of information access for monitoring and evaluation as well as decision making at all levels. The planned rollout intended to achieve total coverage in the next 12months should deserve further celebration. However, the silent challenge remains the balance of items not included in reports. Work plans for the immediate future should address this gap.

Although the WIMS has been in operation for more than 10 years, no real opportunity was created to test its potential. The warehouse layouts and design have operated at the most basic level without full application of inventory management practices for receiving, bin management,

pending management, inventory allocation, picking management, capturing of batch numbers and expiry dates, etc. In the absence of full function activation, the capacity for a broader range of management reports has not been possible.

The entire inventory management system has operated without any attempt to manage stockholding costs. Accounts payable, accounts receivable, customer relationship management, hold management, order fulfillment, and vendor management modules are dormant. All advantages of bar-coding technology are not part of the operations.

Further assessment should therefore await implementation of the WIP.A full activation of WIMS functions should be implemented immediately thereafter. This will create the premises for software upgrade or replacement. The logic in integrating WIMS and UIMS should be further explored at this stage.

SHELVING AND RACKING

Shelving and rack options are the centerpiece of any warehouse. Four options are available: pallet racking; drive-in racking; light-duty racking; and decked racking.

Pallet Racking

This option provides heavy loading capacity, sometimes as high as 4,500kilograms per level. It is one of the most widely used systems, universal and reliable, but it relies entirely on safe, mechanically sound forklifts, stackers, and other material-handling equipment. The spare parts are simple and cost-effective. The racking is easy to install and uninstall because most components work on the boltless approach. Although in use at the central warehouse and no accidents have been reported in the last four years, additional safety assurances mean that decks should now be included in the improvement plan. This should be considered option 2 of 4.

Drive-in Racking

This option is mostly used for temperature-sensitive products and heavily relies on the use of mechanized handling equipment. This is proposed as option 4 of 4.

Light-to-Medium-Duty Racking

Light-duty racking safely supports between 1,000 and 4,000 kilograms per bay. This shelf load would fit the requirements of smaller storage facilities and is proposed for facilities such as Boalkhali and Shaturia. The focus in this report, however, is on larger and heavy-duty storage warehouses. This should be considered option 3 of 4.

Decked Racking

The advantages of decked racking include easy drop-in installation and easy removal. It provides a secure self-locking shelf for all methods of loading: manual, forklift, or stackers. The heavy-duty bays support up to 8,000 kilograms per bay. This is the proposed choice for the central warehouse, Chittagong, Khulna, Tangail, and similar-sized DGFP warehouses.



Figure 6: Racking options

Wooden Decks



Figure7: Wooden deck

Galvanized Steel Decks

They are easy to clean, rustproof, and mothproof.

Specifications

- Size: 1,320 mm × 1,000 mm × 50mm wood
- Shelf load / strength: to support minimum 1,000-kg load
- Fit: self-locking flash over beams
- Wood: supplier to specify available range



Figure 8: Steel deck

Steel Wire Mesh Decks

They are easily drop-in installed; offer better illumination of products; decrease fire hazard (preference over wooden decks) and thus may reduce insurance rates; and are low maintenance, economical, durable, sanitary, self-cleaning by allowing dirt and dust to fall through the open mesh. This is the recommended choice for BGFP warehouse decks.




Figure 9: Steel wire mesh decks

Specifications:

- Size: 1,320 mm ×1,000 mm
- Grid: 50 mm × 100 mm × 4 Ga
- Shelf load/strength to support minimum 1,000-kg load
- Fit: flared 50 mm

HANDLING EQUIPMENT: TROLLEYS, LADDERS, PALLETS, LIFTING, PACKAGING

Trolleys

Multipurpose trolleys are recommended for awkward, bulky, or heavy loads for all warehouses.



Specifications

- 300-kg loading
- Electro-galvanized
- Heavy-duty caster configuration

Figure 10: Multipurpose trolleys



Specifications

- 1,000 L × 610 W × 1,050 H
- 250-kg weight capacity
- Standard enamel painted in blue or gray
- 100 mm heavy-duty casters, two fixed and two swivel

Figure 11: Picking trolley, two shelves, for district and Upazila



Specifications

- 1,000 L × 610 W × 1,050 H
- 250-kg weight capacity
- Standard enamel painted in blue or gray
- 100-mm heavy-duty casters, two fixed and two swivel

Figure 12: Picking trolley, three shelves, regional, district, and Upazila levels



Figure 13: Galvanized platform trolleys

Figure 14: Rocker trolley

Specifications

- 300-kg loading capacity
- Two fixed and two swivel casters
- 1,200L × 690W

These are ideal for district level.

Specifications

- 900-kg loading capacity
- Two fixed and four swivel casters
- 1,500 H × 610 W
- Galvanized

These are most flexible and recommended for central and regional warehouses.



•

Specifications

- 900-kg load capacity
- 1,500 H x 760 W
- Galvanized finish
- 350-mm diameter solid rubber wheels

Recommended for central and regional warehouses.

Figure 15: Turntable trolley

Ladders

Industrial ladders have multiple uses. Central and regional warehouses should have them.



Specifications

Capacity: 150 kg

- 10 steps
- Wide nonslip steps
- Aluminum
- Full length: 2.92 m

Figure 16: Industrial ladders

Platform ladders are recommended for central and regional warehouses.

Specifications

- 10 steps
- Top step height: 2,560 mm
- Overall height: 3,290 mm
- 2 x 100 mm lockable casters (kick brakes)
- 2 x 100 mm fixed casters
- Safety bar and hand rail
- L x W base dimensions: 1,865 x 1,140 mm
- Nonslip treads

Specifications

- Six steps
- Top step height: ,1570 mm
- Overall height: 2,170 mm
- 2 x 100 mm lockable casters (kick brakes)
- 2 x 100 mm fixed casters
- Safety bar and hand rail
- L x W base dimensions: 1,250 x 960 mm
- Nonslip treads



Figure 17: Platform ladder

Pallets

Wooden pallets are high maintenance; they require gentle handling. Their life span is shortened by exposure to water and humidity. They are not recommended.



Figure 18: Wooden pallets

Specifications

- 25 mm pine
- Slatted top
- 1,000-kg loading capacity
- 1,200 mm × 1,000 mm × 185 mm
- Four-way entry

Plastic pallets are low maintenance, washable, light, and cheaper than steel pallets. They are recommended because of their manageable handling weight, easy care, and safety.



Specifications

• Size: 1,200 mm × 1,000 mm × 150 mm

Weight: 12 kgFour-way entryDynamic load: 1 ton

Figure 19: Plastic pallets

Steel pallets are durable and long lasting and they can be repaired, but they are expensive. They are also heavy and pose a risk to foot injury and are therefore not recommended.



Figure 20: Steel pallets

Specifications

- 1,000-kg loading capacity
- Four-way entry
- 27.5-kg weight
- Seven steel slats

Lifting



Figure 21: Pallet truck

Specifications

- 3-ton capacity
- Polyurethane double bogie wheels
- Maximum lift height of 200mm
- Sizes: 1,200 mm Lx 680 mm W; 1,200 mm L x 520 mm W
- One-year guarantee



Specifications

Combination lift table and pallet jack

Capacity: 1,000 kg

Maximum lifting height 800 mm

Sizes: 1,200 mm Lx 680 mm W; 1,200 mm Lx

520 mm W

Figure 22: High-lift pallet jack

High-lift pallet jacks reduce back injuries and are recommended equipment.



Specifications

- 3500-mm lifting height
- 1,500-kg lifting capacity
- Controlled lifting and lowering
- Small turning radius
- Compact design, lo net weight
- Built-in compact power pack/battery and charger
- One-year guarantee

Figure 23: Electric stacker

Electric stackers are recommended for central and regional warehouses.

Packaging

Heavy-duty packing and wrapping benches are recommended equipment because they have the following benefits—

- Create maximum packing tables and benches storage space
- Maximize floor space
- Increase efficiency
- Raise worker morale by keeping backs healthier



Specifications

Above and below packing tables and bench components should be added or removed as required.

- Adjustable in height from 29to 36inches
- All components adjustable to accommodate the worker
- All sheet metal components 14–16 gauge steel
- Packing tables support up to 500 kg
- Rounded edges with inlaid t-molded vinyl edges for protection
- Highest quality tops

Figure 24: Heavy-duty packing and wrapping benches



Figure 25: Plastic strapping machine

Specifications

Strap size: 12.5 mm

• Strap type: all plastic

Application: single-feed high joint strength

• Shipping weight: 9 lbs.

Recommended for all facilities



Figure 26: Tape dispenser

Specifications

- 48 mm tape width 72 mm tape width

Recommended for all facilities

SAFETY, HEALTH, AND STAFF WELFARE

Cleaning



Figure 27: Industrial vacuums and accessories

Specifications

- 3 x two-stage motors
- 3,600 watts 8 L tank
- 160 L/sec airflow
- 2 x two-stage motors
- 2,400 watts 70 L tank
- 100 L/sec airflow

Recommended for central and regional warehouses



Figure 28: Warehouse polisher and scrubber

Specifications

- Brush and pad size:425mm
- Weight: 32kg
- Speed: 300 rpm
- Ideal for all hard floors
- Must include pad drive

Recommended for central and regional warehouses



Specifications

With side brush: 670mmWithout side brush: 480mm

• Hopper capacity: 40 L

• Weight: 24kg

Recommended for central and regional warehouses

Figure 29: Manual sweeper



Figure 30: Rubbermaid safety floor sign

Specifications

- Yellow
- Plastic
- 11 W × 1.5 D × 25 H

Recommended for all facilities



Figure 31: Warehouse cleaning mops



Figure 32: Hand drier

- 120-L waste bag and lid
- 2 x 22 L buckets
- 4 x 5 L buckets (red/blue/green/yellow)
- 2 x full trays
- Dual all-mop press
- 1 × 400 g local mop head
- Single aluminum handle

- Stainless steel
- ABS hang drier
- 2,500 / 1,650 watts
- One-year guarantee



Figure 33: Soap dispenser

Figure 34: High-pressure cleaners

- 1.2-Lsoap dispenser
- Stainless steel
- Lockable

Specifications

- Pump pressure 120 bar
- Water flow: 7.3 L min/max
- Cleaning power: 1.7 kw
- Weight: 15.5 kg
- Includes hose reel

Recommended for central and regional warehouses



Figure 35: Refuse container

- 1,000-L bin
- Two free-wheeling casters and two casters with brakes
- Capacity: 300 kg
- Size: 1,260 × 1,305 × 772 mm
- Can supply in black, gray, or green

Recommended for central and regional warehouses

Safety



Figure 36: Refrigerator

Specifications

- Capacity: 13 cu. ft.
- Energy rating: A+
- Auto-defrost
- Five shelves



Figure 37: Fire extinguisher

Specification

9-kg dry chemical extinguisher

Recommended for all facilities



• 5-kg water and foam extinguisher

Recommended for all facilities

Figure 38: Water and foam extinguisher



Figure 39: Safety signage

- Size:150× 150mm
- 0.9-mm thick ABS doublesided foam
- Good scratch resistance and hardness

Protective Wear



Figure 40: Hand protection wear

Specifications: Consider sourcing locally

A = Pigskin candy stripe 5 cm

B = Reinforced chrome leather 5 cm

C = Reinforced chrome leather 20 cm

D = Candy stripe chrome leather E = Green-lined leather welder 5 cm

F = Green-lined leather welder 10 cm

G = Red-lined leather heat 20 cm

H = Crinkle black rubber 20 cm





Figure 41: Foot protection wear



Figure 42: Protective clothing

Specifications To be ascertained after selections Consider sourcing locally



Specifications subject to final selection

Figure 43: High-visibility wear



Figure 44: Industrial locker

- Size: 1,800 H x 410 W x 430 D mm
- Single
- Galvanized steel
- Gray
- With money box and shelf

Other



Figure 45: Steel lockable cabinet

Figure 46: Industrial scales

Specifications

- Five shelves
- 1,800 H ×1,200 W × 600 D mm
- Lockable casters
- Galvanized steel

- Bench scale
- Size: 1,200 mm ×1,000 mm
- 1,000-kg capacity
- Digital Reading
- Rechargeable batteries



Figure 47: Labeling machine

Figure 48: Warehouse identification

Specifications

- PC compatible (USB and serial)
- 10 font styles
- 18 print sizes
- 24 print sizes
- Vertical alignment
- Bar-code functions
- 20 mm per second speed
- QWERTY keyboard
- 10 240-character memory
- Six tape widths

Specifications

 $F1 = 9.5 \times 6 \text{ mm}$

 $F2 = 12.5 \times 8.5 \text{ mm}$

 $F3 = 19 \times 14 \text{ mm}$

 $F4 = 38 \times 21 \text{ mm}$

 $F5 = 56 \times 21 \text{ mm}$

 $F6 = 90 \times 36 \text{ mm}$



Specifications
Dimensions to match beam sizes –
heavy and medium

Figure 49: Bin location label holders



- 18oz nylon reinforced vinyl curtain
- Industrial grade, light cream
- With installation kit

Figure 50: Temperature control strip door kit


CONCLUSION

This comprehensive review has identified gaps and recommended short, medium, and long term interventions to address the gaps. The recommended floor plans will help optimize the warehouse design; thereby improving storage space and product safety. The recommended types, specifications and quantities of shelving and handling equipment will inform and rationalize the selection and procurement of the equipment. The specifications and pictures included in the catalogue will ensure common interpretation and understanding of the recommended warehousing equipment and handling materials. Implementation of these warehouse improvement recommendations is expected to improve the efficiency and effectiveness of the national supply chain logistics management system, and thereby increasing availability and access to RH/FP commodities in Bangladesh.

REFERENCES


- John Snow, Inc./DELIVER. 2004. *The Logistics Handbook: A Practical Guide for Supply Chain Managers in Family Planning and Health Programs*. Arlington, VA: John Snow Inc./DELIVER, for the US Agency for International Development (USAID).
- John Snow, Inc./DELIVER. 2005. *Logistics Indicators Assessment Tool (LIAT)*. Arlington, VA: John Snow, Inc./DELIVER, for the US Agency for International Development.
- Johnson, Michael, Danny Addison, and Thulani Mbatha. 2010. Assessment of the Government of Bangladesh, Directorate-General of Family Planning Warehousing and Logistics Systems. Submitted to the US Agency for International Development by the Strengthening Pharmaceutical Systems (SPS) Program. Arlington, VA: Management Sciences for Health.
- Miller, Roger, Raj Gonsalkorale, and Danny Addison. 2010. Comprehensive Assessment for the Government of Bangladesh, Directorate General of Health Services, Central Medical Stores Depot. Submitted to the US Agency for International Development by the Strengthening Pharmaceutical Systems (SPS) Program. Arlington, VA: Management Sciences for Health.
- Systems for Improved Access to Pharmaceuticals and Services. 2011. *Bangladesh: Work Plan: October 2011–September 2012*. Submitted to the US Agency for International Development by the Systems for Improved Access to Pharmaceuticals and Service (SIAPS) Program. Arlington, VA: Management Sciences for Health.
- USAID | DELIVER PROJECT, Task Order 1. 2009. *Logistics System Assessment Tool (LSAT)*. Arlington, VA: USAID | DELIVER PROJECT, Task Order 1.
- USAID | DELIVER PROJECT, Task Order 1. 2010. *Delivering Family Planning One Village at a Time: 20 Years of Supply Chain in Work in Bangladesh*. Arlington, VA: USAID | DELIVER PROJECT, Task Order 1.
- USAID | DELIVER PROJECT, Task Order 1. 2011. *The Logistics Handbook: A Practical Guide for the Supply Chain Management of Health Commodities.* 2nd ed. Arlington, VA: USAID | DELIVER PROJECT, Task Order 1.
- Wuliji, Tana, Gail Naimoli, and Momtaz Shirin. 2011. *Building Procurement and Supply Chain Management Capacity for the Directorate General of Family Planning*. Submitted to the US Agency for International Development by the Strengthening Pharmaceutical Systems (SPS) Program. Arlington, VA: Management Sciences for Health.

APPENDIX A1: FLOOR PLAN FOR CENTRAL WAREHOUSE

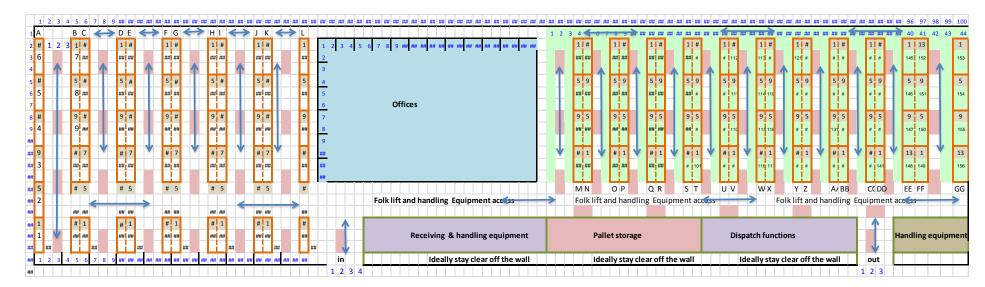


- 1 Uprights Heavy Duty 4.2m H = 210
- 2 83 Bays
- 3 Beams Heavy duty 1000kg load 1500mm = 4 tier = 672
- 4 Decks wire mesh 1000kg load 1000mm x 750mm = 1258
- 5 Frame protectors / Guards = 84
- 6 Bin locations = 602
- 7 Pedestrian, Safety, Racking bariers = 22
- 8 4 tier shelving
- 9 6 ft twin fluorescent lighting
- # 6 ft twin lighting plan 64
- # Floor repairs / resurfacing

APPENDIX A2: FLOOR PLAN FOR CENTRAL WAREHOUSE REPACKAGING

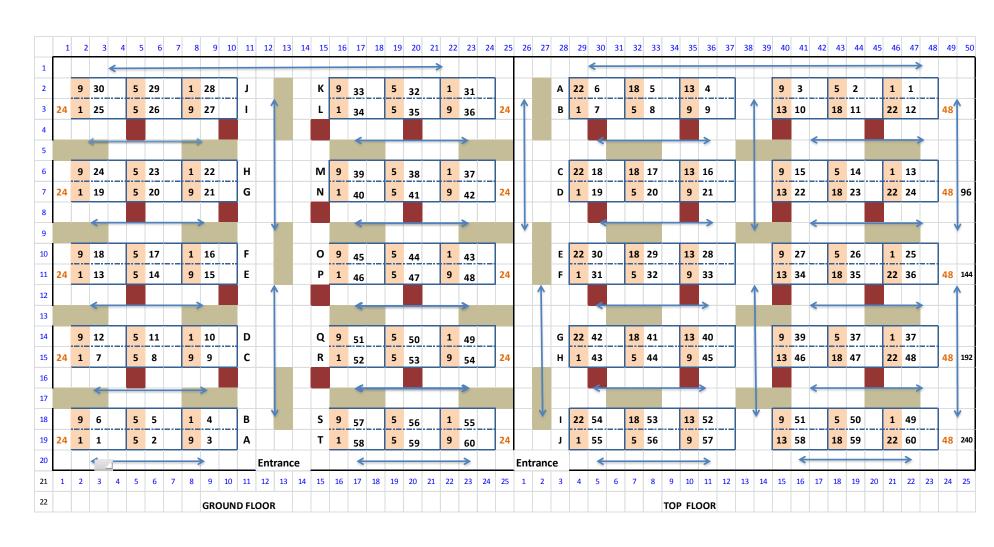

1	Uprights - Heavy Duty - 2.8m H = 320	Handling Equipment listed on Spreadsheet
2	120 Bays	
3	Beams - Heavy duty - 1000kg load 3000mm = 4 tier = 960	
4	Decks wire mesh 1000kg load - 1000mm x 1500mm; 4 tier = 960	
5	Frame protectors / Guards = 80	
6	Bin locations = 480	
7	Pedestrian, Safety, Racking bariers = 40	
8	4 tier shelving	
9	6 ft twin fluorescent lighting plan	

APPENDIX A3: FLOOR PLAN FOR CENTRAL WAREHOUSE GARAGE

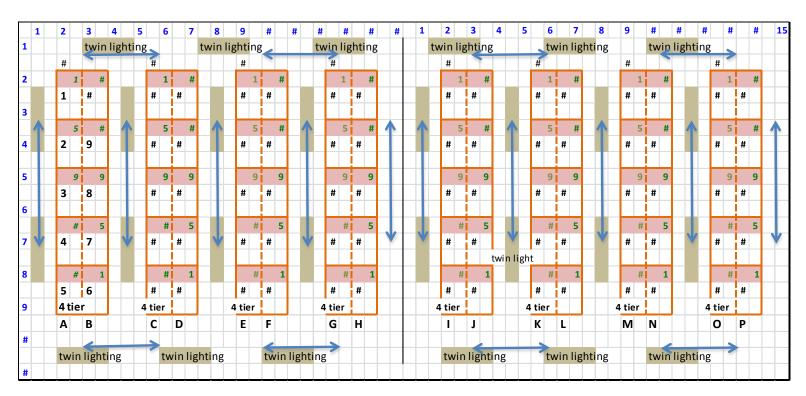

Shelving

- 1 Uprights Heavy Duty 2.8m H = 192
- 2 76 Bays
- 3 Beams Heavy duty 1000kg load 1500mm = 4 tier = 640
- 4 Decks wire mesh 1000kg load 1000mm x 750mm = 640
- 5 Frame protectors / Guards = 64
- 6 Bin locations = 320
- 7 Pedestrian, Safety, Racking bariers = 8
- 8 4 tier shelving
- 9 6 ft twin fluorescent lighting

APPENDIX B: FLOOR PLAN FOR CHITTAGONG REGIONAL WAREHOUSE

	4	2	2 4			Ι,			10		42	42		45	10	47	40	10	20	24	22	22	24	25	20	27	20	20	20	24	22	22	24	25	20	27	20	20	40	41 41
1	1	2	3 4	5	6	7	8	9	10	11	12	13	14	15	16	1/	18	19	20	42m		23	24	25	26	21	28	29	30	31	32	33	34	35	36	37	38	39	40	41 42
2		twin	n lighting		+	+	tv	vin lig	hting				twi	n ligh	ting		-		twi	n ligh				>	twi	in ligh	ting				twi	n ligh	ting		_		twir	n lighti	ing	
3			1			١.	2			3				4				5				6				7				8		Ū		9				10		
4			1 32		+	1	+	2			32				32				32				32	i			32				32			1				1	32	+
5		_	1 18				9 36			Н	54			55					90				##	1			##				##				##			##	-	
6	1		4 tier		1		tier		1	4 ti		1	1	4 tie		1		4 ti	1	1	Λ.	4 ti		,	Λ.	4 ti	-	1		4 ti	1		Λ.	4 ti		- 1		4 tie	_	4
7			5 28		г	-	28	3		Н	28		Н		28			_	28				28	ı	Н	-	28			_	28				28			5	_	
8			2 17	1	t		35	-			53			56					89				##	1			##				##				##	H		##	-	+
9			4 tier	t	t		tier		+	4 t				4 tie				4 ti	_			4 ti				4 ti	_			4 ti				4 ti	_			4 tie	_	
10		,	8 24			-	24	1	1	-	24	,			24	,	,		24	,		_	24	,		-	24	,			24	,			24			8	_	
11			3 16		Ť		1 34				52			57					88				##	1			##				##				##			##	-1	
12			4 tier	Н			tier			4 ti				4 tie				4 ti	!			4 ti				4 ti				4 ti				4 ti				4 tie	-1	
13			12 20			-	2 20)		-	20			12					20			12		H			20				20				20			12	-	
14			4 15	1	+		2 33	-	+	Н	51			58					87				##	1			##				##				##			##	-	+
15			4 tier		4	-	tier		Α.	4 ti	•	4	1	4 tie		-	1	4 ti		-	٨	4 ti		,	Λ.	4 ti		-		4 ti			1	4 ti		- 1		4 tie		A
16			16 16			-	5 16	5		Н	16			16					16				16				16				16				16			16	_	
17			5 14		H		3 32		Н	Н	50			59			Н		86				##	1			##				##				##			##	-1	
18			4 tier	Г	Н		tier	Г	Т	4 ti			Н	4 tie				4 ti	-			4 ti				4 ti	-			4 ti	-			4 ti				4 tie	_	
19			20 12		V.	-	0 12	2	\downarrow	Н	12	,		20		,	,	_	12	,			12	,		-	12		,		12	,			12		,	20	_	\downarrow
20			6 13	1			4 31	-			49			60					85				##	1			##			##	1				##			##	##	
21			4 tier				tier			4 t				4 tie				4 ti				4 ti	_			4 ti	er			4 ti	e			4 ti	١			4 tie	-	
22			24 8			-	1 8			-	8			24					8			24				24				24					8			24	_	
23			7 12			25	5 30)		43	48			61	66			79	84			97	##			##	##			##	##			##	##			##	##	
24	4		4 tier	Г	1	4 t	tier	Г	1	4 t	ier	1	1	4 tie	er	1	1	4 ti	er	1	1	4 ti	er		1	4 ti	er	1		4 ti	e			4 ti	er	1	1	4 tie	r	1
25			28 5	t	Г	28	3 5			28	5			28	5			28	5			28	5	ı		28	5			28	5			28	5			28	5	
26		П	8 11		t	26	5 29	9	T	44	47			62	65			80	83			98	##	Г		##	##			##	##			##	##			##	##	
27			4 tier	ı	t	4 t	tier	t	1	4 ti	ier			4 tie	er			4 ti	er			4 ti	er			4 ti	er			4 ti	er			4 ti	er			4 tie	r	
28	,	,	32 1		1	32	2 1		V	32	1	١		32	1	,	,	32	1	,		32	1	,		32	1	,	,	32	1			32	1	1	,	32	1	•
29			9 10			27	7 28	3		45	46			63	64			81	82			99	##			##	##			##	##			##	##			##	##	
30			4 tier	Г		4 t	tier	Г		4 t	ier			4 tie	er			4 ti	er			4 ti	er			4 ti	er			4 ti	er			4 ti	er			4 tie	r	
31			А В			С	D	,		Ε	F			G	Н			ı	J			К	L			М	N			0	Р			Q	R			s	Т	
32		twin	n lighting	*			tv	vin lig	hting		•		twi	n ligh	ting		42m		twi	n ligh	ting			>	twi	in ligh	ting				twi	n ligh	ting		_		twir	n lighti	ing	
33				9m						4m				Fre	e							12m								4m						9m				
34			Re	cei					На	andl	ing			Pall						P	alle			ge						ndli	ing						patc	h		4m
35	4m				J						nent				rage	•												4m			nent		4m							
36					1																																			
37				11r	n			Τ												20m															11m				П	
38	4m				П						4m						Off	ices																		1				4m
39			Of	floa	din	g Ba	ay																							4m				Loa	ding	Bay		\Box		
40					T	T	İ							:	3 fan:	s 7	ligh	ts C	ffic	es																		П		
					11	m																													11m	П			\exists	
																																						П	\exists	
																			20r	n																				

She	lving
1	Uprights - Heavy duty 8000kg bay capacity -4.2m H = 400
2	180 Bays
3	Beams - Heavy duty - 1000kg load x 3000mm = 4 tier = 1440
4	Decks wire mesh 1000kg load heavy duty - 1500mm x 1000mm = 1440
5	Frame protectors / Guards = 80
6	Bin locations = 720
7	4 tier shelving
8	6 ft twin fluorescent lighting
9	Pedestrian, Safety, Racking bariers = 20
10	Light plan = 42 6ft twin fluorescent day lights
11	Floor replacement

APPENDIX C1: FLOOR PLAN FOR KHULNA REGIONAL WAREHOUSE

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
N	/lair	ı W	areh	ous	e_													36m																	2m			
			1				2				3				4				5				6				7				8		_					
			1	8			1	8			1	8			1	8			1	8			1	8			1	8			1	8			Handli	ing		
			1	6			7	12			13	18			19	24			25	28			29	34			35	40			41	46				6m		
Ī	1		4 tier		-	1	4 tier		,	1	4 tier		-		4 tier		-		4 tier		1		4 tier		-1		4 tier		1	\	4 tier		1					
	+		5	5			5	5		Н	5	5			5	5			5	5			5	5			5	5			5		+		Equip	men		
		-	2	5				11				17			20				26	27			30				36	39			42	45						
-	H					H	_			H	_			H				H		_								_									13m	
			4 tier			L	4 tier			H	4 tier	Н			4 tier			-	4 tier				4 tier				4 tier				4 tier							
	٧		8	1	_ \	1	8	1		Y	8	1	١	/	8	1	١	b	ı	J	١	/	8	1		/	8	1	١		8	1	Ψ				-	
			3	4			9	10			15	16			21	22							31	32			37	38			43	44			7	7m		
			4 tier				4 tier				4 tier				4 tier			Re	ceiv	ng		5m	4 tier				4 tier				4 tier			Disp	patch	1		
			Α	В			С	D			E	F			G	н							к	L			М	N			0	P	,					
																																			3m			
								16.5	m										6m									13.5n	n					Temr	peratui	re co	ntrol	curt
Ť								20.5									Off I			heigh	t too	short	at 3.5	shoi	iuld b	e 4m,		15.5.							, crata			2011
sı	helv	ing	Main	ware	hous	e													ure co																			
	1 L	Jprig	hts -	Heav	y duty	y 100	0kg ba	у сар	acity	-4.2n	n H = :	124																										
	2 4	18 Ba	ys																																			
I	3 B	3eam	ıs - H	eavy o	duty -	100	Okg lo	ad x3	000m	m = 4	tier	= 368																										
	4 [Deck	s wire	mes	h 100	Okg I	oad h	eavy	duty	- 1500	mm >	100n	nm =	192																								
Ī	5 F	ram	e pro	tecto	rs / G	uards	s = 64																															
Ī	6 B	3in Ic	ocatio	ns =	176																																	
	7 4	1 tier	shel	/ing																																		
T	8	6 ft t	twin f	luore	scent	t ligh	ting																														П	
t	9 P	Pede	striar	ı, Safe	ety, R	ackin	ıg bari	ers =	16																													
_	_			ceme	_	_	_	_	_	_	_	-																							\vdash			

APPENDIX C2: FLOOR PLAN FOR KHULNA REGIONAL WAREHOUSE (LOW TEMPERATURE)


	1	2	3	4	5	6	7	8	9	10	11	12	13
			,	-		U		0		10	11	12	13
		<			\rightarrow		13m		-				
1		1	14			15				29	42		
	1	4 tier		4		4 tier		4		4 tier		-	
2		1	24			1	24			1	24		
		2	13			16	27			30	41		
3		4 tier			,	4 tier			,	4 tier			
	13m	5	20			5	20			5	20		13m
4		3	12			17	26			31	40		
		4 tier				4 tier				4 tier			
5		8	16			8	16			8	16		
	1	4	11	4		18	25	4		32	39	4	•
6		4 tier				4 tier				4 tier			
		12	12			12	12			12	12		
7		5	10			19	24			33	38		
	•	4 tier				4 tier				4 tier			V
8		16	8			16	8			16	8		
		6	9			20	23			34	37		
9		4 tier				4 tier				4 tier			
	1	20	5	4	•	20	5	4	1	20	5		
10		7	8			21	22			35	36		
		4 tier				4 tier				4 tier			
11		24	1		,	24			,	24			
	W	Α	В			С	D			E	F		
12				\Rightarrow				—		-			
13							12m						

Sne	eiving	Low Temp store
1	Uprights -	Medium duty 2000kg bay capacity -2.0m H = 96
2	42 Bays	
3	Beams - N	Medium duty - 400kg load x 1200mm = 4 tier = 336
4	Decks wire	e mesh 400kg load medium duty - 600mm x 900mm = 336
5	Frame pro	tectors / Guards = 24
6	Bin location	ons = 168
7	4 tier shel	ving
8	6 ft twin 1	fluorescent lighting
9	Pedestriar	n, Safety, Racking bariers =

APPENDIX D: FLOOR PLAN FOR TANGAIL REGIONAL WAREHOUSE

TAI	NGA	IL RE	GIOI	NAL	STO	RE															Т	anga	il Sa	dan							
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18					1	2		3		4				
								18m							\		/\ /\ \				L	8	1	8		1					
	12		4	8		3	5		2	1		1	Ε		\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \			c	Office			3	1	3		1					
	1	Ī .	1	2		5	3		8	4		12	D		Reci	ving	*****/ **/^\				2	5	5	5		5					
															Disp	Α.,	<u>* </u>					2	2	2		2					
9m	12		4	8		3	5		2	1		1	С			<u> </u>	Equip.			9m	3	1	8	1		8	5m				
5111	1	 -	1	2		5	3		8	4		12	В		\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	Υ_{\times}						1	3	1		3					
																		,	Office			Δ	В	С		D	3 5h	2 5m	unria	htc	1000mm beams
	1		1	2		5	3		8	4		12	Α						, ince		2,	n bea	me	Off	ico		3.31	2,311	ирпе	,1103	1000mm beams
																					5	II Dea	1115	OII	ice						
	She	elvinį	,																												
1		ights -		y duty	8000)kg ba	ау сар	acity	-2.5m	n H =	= 50																				
2	20 B	lavs																													
3		ms - H	eavy	duty -	1000)kg lo	ad x	3000r	nm = 4	1 tier	= 16	0																			
4	Dec	ks wire	e mes	h 100	Okg Id	oad h	ieavy	duty	- 1500	mm:	x 1000)mm =	= 160																		
5	Fran	ne pro	tecto	rs / Gi	uards	= 16	5																								
6	Bin	locatio	ns =	80																											
7	4 tie	er shel	ving																												
8	6 ft	t twin	fluore	scent	light	ing																									
9	Ped	estria	n, Safe	ety, R	ackin	g bari	iers =	4																							
10	Floo	or repla	aceme	ent																											

APPENDIX E: FLOOR PLAN FOR BOALKHALI WAREHOUSE

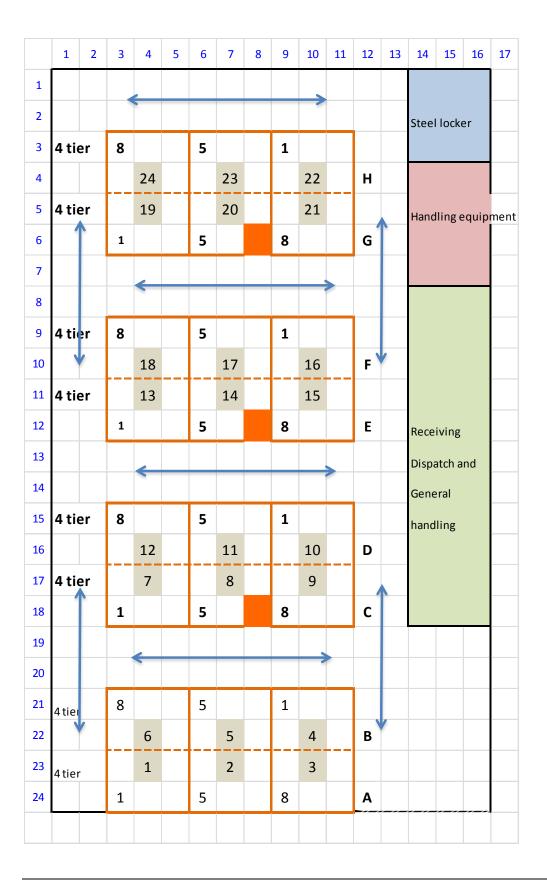

She	elving
1	Uprights - Medium duty 2000kg bay capacity -2.5m H = 64
2	24 Bays
3	Beams - Medium duty - 400kg load x 1500mm = 4 tier = 192
4	Decks wire mesh 400kg load medium duty - 750mm x 900mm = 192
5	Frame protectors / Guards = 32
6	Bin locations = 96
7	4 tier shelving
8	6 ft twin fluorescent lighting
9	Pedestrian, Safety, Racking bariers = 4

APPENDIX F: FLOOR PLAN FOR SHATURIA WAREHOUSE

	1		2		3		4		5		6		7		8		9	10	11	12	13
1										Palle	ts										
	Statio	onery (Cabin	1.5m	Hand	ling Ed	quip.	R	eceiv	ing &	Dispat	tch Fu	nctio	r 1.5m					2.5m H	uprights	
2		2m				1.5m					3.5m								1500m	m Beams Me	dium dut
			~			\rightarrow					_								750mm	x 900mm D	wire
3			F		E				D		С				В		Α		mesh [Decks	
		1		4 tier				1		4 tier				1		4 tier					
4	1		11	10		-			7	6					3	2		1.5m	36 upri	ghts = 18 end	ds
		4 tier			5			4 tier		i i i	5			4 tier			5		96 Bea	ms	
5	V	5		4 tier				5		4 tier		\	,	5		4 tier			96 Dec	cs	
			12	9					8	5					4	1		1.5m	24 Gua	rds	
6		4 tier			1			4 tier			1			4 tier			1				
m		1500r	nm Be	eams		←							\rightarrow			1m					

1	Uprights - Medium 2000kg bay capacity - 2.5m H = 36
2	12 Bays
3	Beams - medium duty - 400kg load x 1500mm = 4 tier = 96
4	Decks wire mesh 400kg load medium - 1000mm x 750mm = 96
5	Frame protectors / Guards = 24
6	Bin locations = 48
7	4 tier shelving
8	6 ft twin fluorescent lighting

APPENDIX G: SUMMARY OF SHELVING AND HANDLING EQUIPMENT

Name of the Principle of the American Environment Conference (1997) 1997		T	_		,				,	,	,	,	, ,					—
Proposed Storage and Handling Equipment for Bangladesh Central, Regional, and District Warehouses Sind LYNG Sind LYNG All quantities are detailed on the sproadwest for every Foor / 2 / 2 / 2 / 2 / 2 / 2 / 2 / 2 / 2 /									/	/	\z^./				//		Pue	
An experiment of the company of the				,		/. ,	Ι,	/		/;	7/	//	/	/ x*/				
An experiment of the company of the					/		-/.	~/	<u>, </u>	* /	/ *	//		£ /	(\$ ¹	/ /	Z Si Si	
An experiment of the company of the				/\$	/8		/.šč	} / ¿	, se / 2	°/ §	\$ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	/ œ ⁸⁶	چ /	70/2°		/ /		કુ
An experiment of the company of the				7	/ & /	\&\	200	/ 👸		(Page)	/🚀	200 /	200	/z*/		/ 80	خى / رخ	Unit
An experiment of the company of the			1	و / ي						8/1			80 /s	2			/ , 5°	/Of
				/ 0	/ 0	<u>/ &</u>	/ 4	/ ~	<u>/ ^</u>	/ <u>~</u>	/ 		/~	/		/ 🕹		Issue
Some process of the process of purposes of		All quantities are deta	liea or	tne	sprea	asneei	TOF	very	FIOOR	/ *	-							
Seeder griff of places of the multi-information of the control of	horizontals, bolt on feet, all nuts and bolts required to build end frames. <i>Bidders</i>									_			١					
	please give full specs of the materials tendered. 1500mm 400kg Beams & 750mm x		-	-	-	-				"			"	-	-	-	-	
The control of the Co										H								
Seeder girt full great of the multimate trendents. (1900ms 200 per page of the multimate trends (1900ms 200 per	horizontals, bolt on feet, all nuts and bolts required to build end frames. <i>Bidders</i>		_		_	_			_	#	_	_	#	_	_	_	_	
Storage Stor																		
	3.0 meter uprights; 1000mm deep, consisting of full end frames, uprights, diagonals,																	
### Annual Publishment Annual Pu	horizontals, bolt on feet, all nuts and bolts required to build end frames. Bidders	Storage	-	-	-	-	-	-	-	#		-	#	-	-	-	-	
	please give full specs of the materials tendered. 3000mm Beams & 1500 x 1000mm wire mesh Decks	-		1			1											
Storage Per Jack of the materials tradered. 2000-ma Beams 8,1509 x,1000-ma	2.5 meter uprights; 1000mm deep, consisting of full end frames, uprights, diagonals,												П					
Storage Stor	horizontals, bolt on feet, all nuts and bolts required to build end frames. Bidders			-	-	-	-	-	-	#	-	-	#	-	-	-	-	
2. Senter upprigners; 2000-om develops; consisting of his least filter to build and frames. Biodisors of the profit of the profit of the mid-resist forther and a 1500-x 1000-om control of the profit	please give full specs of the materials tendered. 3000mm Beams & 1500 x 1000mm wire mesh Decks			L	L		L				L							
Solvege Park Solvege	4.2 meter uprights; 1000mm deep, consisting of full end frames, uprights, diagonals,																	
		Storage	-	-	-	-	-	-	-	#	-	-	#	-	-	-	-	
Storage 1	wire mesh Decks			L	L		L	L		L	L							L
Storage	Frame protectors:	Storage	-	-	-		-	-	-	#	-	-	#		-	-	-	
Reams 2000m, 500e; loading capacity	Pedestrian, Safety, Racking barriers	Storage	-	-	-	-	-	-	-	#	-	-	#	-	-	-	-	
Part	Decking options	Storage	-	-	-	-	-	-	-	#	-	-	#	-	-	-	-	
Part	Beams 1200mm, 400kg loading capacity		-	-	-	-	-	-	-	#	-	-	#	-	-	-	-	
Storage - - - - - - - - -	Beams 1500mm, 500kg loading capacity		-	-	-	-	-	-	-	#	-	-	#	-	-	-	-	
Nondern dricks: 1400mm x 100mm x 100	Beams 3000mm, 2000kg loading capacity		-	-	-	-	-	-	-	#	-	-	#	-		-	-	
Storage		Storage	-	-	-	-	-	-	-	#	-	-	#	-		-		
Non-Steel mesh deck: Size – 1500mm x 1000mm; 6id - 50mm x 100mm x 4 Ga; 1000kg flare fitted Storage			-	-	-	-	-	-	-	#	-	-	#	-		-		
Storage Storag	Wire Steel mesh deck: Size – 1500mm x 1000mm; Grid - 50mm x 100mm x 4 Ga; 1000kg																	
Storage Stor	load; flare fitted	Storage	-	-	-	-	-	-	-	#	-	-	#	-	-	-	-	
Storage Stor	Wire Steel mesh deck: Size = 750mm x 1000mm deen: Grid - 50mm x 100mm x 4 Ga:												H					
HANDUNG EQUIPMENT ### HANDUNG EQUIPMENT #### HANDUNG EQUIPMENT ###################################	1000kg load; flare fitted	Storage	-	-	-	-	-	-	-	#	-	-	#	-	-	-	-	
HANDUNG EQUIPMENT ### HANDUNG EQUIPMENT #### HANDUNG EQUIPMENT ###################################				_														
HANDUNG EQUIPMENT ### HANDUNG EQUIPMENT #### HANDUNG EQUIPMENT ###################################										H			H	-			-	
Authitipurpose Trolley: 300kg loading; electro galvanized; 300mm castors. Handling Equip. 3 - 2 - 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 3,000 3,667 Salvanized Rocker trolley: 1500h x 610w - 680 / 900kg; 4x 150mm castors; 300mm castor Handling Equip. 4 - 4 - 1 1 8 3 1 8 13 4,000 5,778 excl Salvanized Turn Table Trolley: 1500h x 610w - 700kg / 900kg; 350mm castors Handling Equip. 5 - 4 - 1 8 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			-	-													1	
Salvanized Rocker trolleys 1500h x 610w - 680 / 500kg; 3x 150mm castors; 300mm castors Handling Equip. 4 - 4 - 1 8 3 1 8 13 4,000 5,778 ead analysised Turn Table Trolleys 1500h x 760w - 700kg / 900kg; 350mm castors Handling Equip. 4 - 4 - 1 8 3 1 8 1 0 8 6 4,000 2,667 ead analysised Turn Table Trolleys 1500h x 760w - 700kg / 900kg; 350mm castors Handling Equip. 4 1 8 1 0 8 6 4,000 2,667 ead analysised Turn Table Trolleys 1500h x 910w - 700kg / 900kg; 350mm castors Salvanized Platform Trolleys 1200x x 900w, 250 / 300kg 100/125mm castors, Savwel; 2 4 0 0 1 1 0 0 5 5 4,500 2,500 ead analysised Turn Table Trolleys 1500h x 910w - 700kg / 900kg; 250mm castors. Handling Equip. 4 0 0 0 1 0 0 5 5 4,500 2,500 ead analysised Equip. 5 0 0 0 0 0 0 0 0 0	HANDLING EQUIPMENT													-			-	
Salvanized Rocker trolleys 1500h x 610w - 680 / 900kg 4 x 150mm castors; 300mm castors Handling Equip.	Multipurpose Trolley: 300kg loading; electro galvanized; 300mm castors.	Handling Equip.	3	-	-	2	-	1	1	1	1	1	1	11		3,000	3,667	
Salvanised Turn Table Trolleys 1500h x 760w - 700kg / 900kg; 350mm castors Alandling Equip.			1	 	 	1	 	 	1	#	3	1	#	13		4.000	5 778	each
Salvanized Turn Table Trolleys 1800h x 910w - 700kg / 900kg: 350mm castors Handling Equip. 4 8 1 8 5 4,500 2,500 ead salvanized Platform Trolleys 1200L x 690w, 250 / 300kg 100/125mm castors, 2 swivel; 2 Handling Equip. 8 1 8 5 4,500 2,500 ead salvanized Platform Trolleys 1200L x 690w, 250 / 300kg 100/125mm castors, 2 swivel; 2 Handling Equip. 8 1 8 5 4,500 2,500 ead salvanized Platform Trolleys 1200L x 690w, 250 / 300kg 100mm castors. Handling Equip. 1 1 1 2,500 278 ead salvanized Platform Trolleys 1000L x 610w x 1050hm - 2 shelves; 300kg; 200mm castors. Handling Equip. 8 8 2 2,000 444 ead salvanized Platform Trolleys 1000L x 610w x 1050hm - 3 shelves; 300kg; 200mm castors. Handling Equip. 8 8 2,000 4 6 4,000 2,667 ead sollstesps 1350mm top step; 2170mm tep step			-	-	-	 	-	-	1			-						each
Salvanized Platform Trolleys 1200L x 690W, 250 / 300kg 100/125mm castors, 2 swivel; 2 Handling Equip 1 1 1 1 2,500 278 each reading Trolleys 1000L x 610w x 1050hm - 2 shelves; 300kg; 200mm castors. Handling Equip 1 1 - 1 1 1 2,500 4444 each reading Trolleys 1000L x 610w x 1050hm - 2 shelves; 300kg; 200mm castors. Handling Equip 1 1 - 1 1 1 2,500 4444 each reading Trolleys 1000L x 610w x 1050hm - 2 shelves; 300kg; 200mm castors. Handling Equip 1 1 - 1 1 1 3,000 333 400 500 500 500 500 500 500 500 500 500	Galvanized Turn Table Trolleys 1800h x 910w - 700kg / 900kg; 350mm castors		4	Ι-	<u> </u>	-	<u> </u>	-	Ť		1	-	Н					each
Need: Bide Nee	Galvanized Platform Trolleys 1200L x 690W, 250 / 300kg 100/125mm castors, 2 swivel; 2			1.	t_	<u> </u>	1.	t.					\vdash					1
Analysis part of the properties of the propertie	fixed; Blue			H			H	H	-		<u> </u>	-						-
Nollsteps ladders 6 steps 1570mm top step; 2170mm height				-	-		-	1	-	\vdash	-		-			+		-
Rollsteps ladders 8 steps 1570mm top step;mm height Handling Equip. 2 2 - 2 2 8 2 - 8 6 4,000 2,667 ead Rollsteps ladders 10 steps 1570mm top step;mm height Handling Equip. 2 2 - 2 2 8 2 - 8 6 5,000 3,333 and dustrial duty Aluminum Step ladders, 200Kg -300Kg loading 6 steps		nanunng Equip.		1	Ė		1	H	-	-	<u> </u>		-					each
Rollsteps ladders 10 steps 1570mm top step;mm height Handling Equip. 2 2 2 8 2 - 8 6 5,000 3,333 and undustrial duty Aluminum Step ladders, 200kg -300kg loading 6 steps Handling Equip. 2 2 1 1 1 1 1 - 1 8 4 2,000 889 and undustrial duty Aluminum Step ladders, 800-100kg loading 10 steps Handling Equip. 2 2 1 8 1 1 1 8 4 4 2,000 889 and undustrial duty Aluminum Step ladders, 800-100kg loading 10 steps Handling Equip. 2 2 1 8 1 1 1 8 7 5,000 3,889 and undustrial duty Aluminum Step ladders, 800-100kg loading 10 steps Handling Equip. 1 2 1 8 1 1 8 7 5,000 3,889 and undustrial duty Aluminum Step ladders, 800-100kg Room High Handling Equip. 1 2 1 8 1 1 8 7 5,000 3,889 and undustrial duty Aluminum Step ladders, 800-100kg Room High Handling Equip. 1 2 1 8 1 1 8 7 5,000 3,889 and undustrial duty Aluminum Step ladders, 800-100kg Room High Handling Equip. 1 2 1 8 1 1 8 7 5,000 3,889 and undustrial duty Aluminum Step ladders, 800-100kg Room High Handling Equip. 1 2 1 8 1 1 8 5 5,000 3,889 and undustrial duty Aluminum Step ladders, 800-100kg Room High Handling Equip. 1 2 1 8 1 1 8 5 5,000 3,889 and undustrial duty Aluminum Step ladders, 800-100kg Room High Handling Equip. 1 2 1 8 1 1 8 5 5 5,000 3,889 and undustrial duty Aluminum Step ladders, 800-100kg Room High Handling Equip. 1		Handling Equip		÷	÷	2	Ė	Ħ		#	,		#			+		each
Andustrial duty Aluminum Step ladders, 200kg -300kg loading 6 steps Industrial duty Aluminum Step ladders, 800-100kg loading 6 steps Handling Equip. 2 2 2 8 2 - 8 6 3,000 2,000 ead steel lockable cabinet sliding door 190cm H x 120cm W Grey 2 2 2 1 8 1 1 1 8 7 5,000 3,889 Hydraulic Pallet Jack 680mm wide - 3000kg ,800mm height Handling Equip. 1 2 8 1 1 8 1 1 8 7 5,000 3,889 Hydraulic Pallet Trucks - 3000kg 12001 x 680mm w. 200mm lifting height Handling Equip. 1 2 8 1 1 8 1 1 8 5 5,000 2,778 ead w. 2000 and steel pallets; 50mm Pine; Slated top; 1200mm x 1000mm x 185mm; 1000kg loading; 4 way entry; Handling Equip. 50 - 100 - 5 15 5 50 10 8 235 1,000 26,111 Steel pallets; 1200mm x 1000mm x 150mm; 27.5kg; 1000kg loading; 7 steel slates; 4 way Handling Equip. 1 2 8 1 1 8 4 4 40,000 17,778 ead w. 2000 and steel pallets; 1200mm x 1000mm x 150mm; 1000kg capacity; Digital reading; Handling Equip. 1 2 8 1 1 8 4 4 40,000 17,778 ead w. 2000 and steel pallets; 1200mm x 1000mm x 1000m			-	1-	1	2	-	-	-	#	2	-	#			,	,	caul
Andustrial duty Aluminum Step ladders,800-100kg loading 10 steps Handling Equip. 2 2 1 8 1 1 8 7 5,000 3,889 Hydraulic Pallet Jack 680mm wide - 3000kg , 800mm height Handling Equip. 1 2 8 1 8 1 1 8 7 5,000 3,889 Hydraulic Pallet Jack 680mm wide - 3000kg , 800mm height Handling Equip. 1 2 8 1 1 8 5 5,000 2,778 Handling Equip. 1 2 8 1 1 8 5 5,000 2,778 Handling Equip. 1 2 8 1 1 8 5 5,000 2,778 Handling Equip. 8 1 1 8 5 5,000 2,778 Handling Equip. 8 1 1 8 5 5,000 2,778 Handling Equip. 8 1 1 8 5 5,000 2,778 Handling Equip. 8 1 1 8 5 5,000 2,778 Handling Equip. 8 1 1 8 5 5,000 2,778 Handling Equip. 8 1 1 8 5 5,000 2,778 Handling Equip. 8 1 1 8 5 5,000 2,778 Handling Equip. 8 1 1 8 5 5,000 2,778 Handling Equip. 8 1 1 8 2 1 1 1 4 1 8 1 Handling Equip. 8 1 1 8 1 1 1 1 1 1		0 -4-1h.	Ť	\vdash		Ť	<u> </u>	1	1	-			\vdash					\vdash
Steel lockable cabinet sliding door 190cm Hx 120cm W Grey 2 2 1 8 1 1 8 7 5,000 3,889 Advirable Pallet Jack 680mm wide - 3000kg , 800mm height		Handling Equip.	2	-	-	2	-	-	-		2		\vdash					each
And the part of th	Steel lockable cabinet sliding door 190cm H x 120cm W Grey	3 4-1-	_	_	ļ-		_	-	1			1	\vdash			 		
Avdraulic Pallet Trucks - 3000kg 1200l x 680mm w, 200mm lifting height Handling Equip. 1 2 8 1 1 1 8 5 5,000 2,778 ead Nooden pallets; 50mm Pine; Slated top; 1200mm x 1000mm x 185mm; 1000kg loading; Handling Equip	Hydraulic Pallet Jack 680mm wide - 3000kg , 800mm height	Handling Equip.	 	+	-	-	+	-	-	#	1	-	#					each
Plastic pallets; 1200mm x 1000mm x 150mm; 12kg; 1000kg loading; 4 way entry; Handling Equip. 50 - 100 - 5 15 5 50 10 # 235 1,000 26,111 Steel pallets; 1200mm x 1000mm x 150mm; 27.5kg; 1000kg loading; 7 steel slates; 4 way Handling Equip # # # 2,000 Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers Handling Equip. 1 2 2 # 1 - # 4 4 40,000 17,778 Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers Handling Equip. 1 2 2 # 1 - # 4 4 40,000 17,778 Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers Handling Equip. 1 2 2 # 1 - # 4 4 40,000 17,778 Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers Handling Equip. 1 2 2 # 1 - # 4 4 40,000 17,778 Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers Handling Equip. 1 2 2 # 1 # 2 - # 7 7,000 5,444 Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers Handling Equip. 2 2 1 # 2 - # 7 7,000 5,444 Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers Handling Equip. 2 4 1 # 3 3 2 # 12 1,000 1,333 Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers Handling Equip. 2 4 1 # 3 3 2 # 12 1,000 1,333 Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers Handling Equip. 2 4 1 # 1 1 4 1 # 16 400 711 Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers Handling Equip. 3	Hydraulic Pallet Trucks - 3000kg 1200l x 680mm w, 200mm lifting height		1	-	-	2	-	-	-	#	1	1	#	5		5,000	2,778	each
Steel pallets; 1200mm x 1000mm x 150mm; 27.5kg; 1000kg loading; 7 steel slates; 4 way Handling Equip.	Wooden pallets; 50mm Pine; Slated top; 1200mm x 1000mm x 185mm; 1000kg loading;	Handling Equip.	Ŀ	-	<u> </u>	L-	Ŀ	-	-	#	Ŀ	_	#			400	-	
Handling Equip. 1 2	Plastic pallets; 1200mm x 1000mm x 150mm; 12kg; 1000kg loading; 4 way entry;	Handling Equip.	50	-	-	100	-	5	15	5	50	10	#	235		1,000	26,111	
Adultiral Scales; Bench scale; 1200mm x 1000mm; 1000kg capacity; Digital reading; Handling Equip. 1 2 # 1 - # 4 3,000 1,333 Heavy duty packing & wrapping benches. all sheet metal components 14-16 gauge teel; Handling Equip. 2 2 1 # 2 - # 7 7,000 5,444 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 # 3 2 # 12 1,000 1,333 Rape Dispensers 48mm Handling Equip. 4 4 - 1 1 1 1 4 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 4 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 4 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 4 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 4 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 4 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 4 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 4 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 1 4 1 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 1 4 1 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 1 4 1 1 # 16 400 711 Packing tables to support up to 1000kg; Handling Equip. 2 4 1 1 1 1 1 4 1 1 # 16 4 1 8 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Steel pallets; 1200mm x 1000mm x 150mm; 27.5kg; 1000kg loading; 7 steel slates; 4 way	Handling Equip.		Ŀ	<u> </u> -	-	Ŀ	-	-	#	-	-	#	-		2,000	-	
Rechargeable batteries Handling Equip. 1 2	Electric Stacker; 1500kg lifting capacity; 3.5m lifting height, with battery chargers	Handling Equip.	1	-	-	2	-	-	-	#	1	-	#	4		40,000	17,778	each
Heavy duty packing & wrapping benches. all sheet metal components 14-16 gauge tetel; Handling Equip. 2 2 1 # 2 - # 7 7,000 5,444 Plastic Strapping; Handling Equip. 2 4 1 # 3 2 # 12 1,000 1,333 Tape Dispensers 48mm Handling Equip. 4 4 - 1 1 1 4 1 # 16 400 711 ead	Industrial Scales; Bench scale; 1200mm x 1000mm; 1000kg capacity; Digital reading;	Handling Equip	_			_								,		2 000	4 222	
Handling Equip. 2 2 1 # 2 - # 7 7,000 5,444	incuring caute valleries	menuning Equip.	1	1	1	2	1		-	#	1	-	#	4		3,000	1,555	
Packing tables to support up to 1000kg; Plastic Strapping; Handling Equip. 2 4 1 # 3 2 # 12 1,000 1,333 Tape Dispensers 48mm Handling Equip. 4 4 - 1 1 1 4 1 # 16 400 711 Face Dispensers 48mm	Heavy duty packing & wrapping benches. all sheet metal components 14-16 gauge																	
Plastic Strapping; Handling Equip. 2 4 1 # 3 2 # 12 1,000 1,333	steel; Parking tables to support up to 1000kg	Handling Equip.	2	-	-	2	-	-	1	#	2	-	#	7		7,000	5,444	
Tape Dispensers 48mm Handling Equip. 4 4 - 1 1 1 4 1 # 16 400 711 ead	Plastic Strapping;	Handling Equip.	2	-	-	4	-	-	1	#	3	2	#	12		1,000	1,333	
	Tape Dispensers 48mm			_	-	+	+	1	1		4		#					each
	Tape Dispensers 72mm		_	_	-		_	1	1	1	4	1	#			400		each

		_			_			_						 		
WAREHOUSE IDENTIFICATION: SIGNAGE AND LABELING	Signage		<u> </u>										-			
Labelling machine; PC Compatible (USB and serial); 10 font styles; 18 print sizes; 24 print sizes; vertival alignment; Barcode functions; 20mm per second; QWERTY leyboard; 10 240 character memory; 6 tape widths	Signage	1	-	-	2	-	-	-	#	1	-	#	4	8,000	3,556	
Warehouse Identification Awaiting final selection	Signage	1	1	-	2	-	-	1	#	1	1	#	7	6,000	4,667	
Bay Marker Plates 260 x 167mm (BAI ADHESIVE)	Signage	1	1	-	2	-	-	-	#	1	1	#	6	5,000	3,333	each
Laminated tape labels for P touch printer QO 1050 18; 24; 36mm rolls	Signage	20	20	20	40	-	-		#	20	,	#	120	1,000	13,333	Each
													-		-	
			-										-		-	
SAFETY; HEALTH; AND STAFF WELFARE	Health & Staff Welfare		-										-		-	
Industrial vacuum cleaners; 3 x two stage motors; 3600watts 80L tank; 160L / sec air flow; 2 x two stage motors; 2400 watts 70L tank; 100L/sec air floor	Health & Staff Welfare	1	-	-	2	-	-	-	#	1	-	#	4	8,000	3,556	
Warehouse Scrubber & Polisher 300rpm, 425mm brush and pad size	Health & Staff Welfare	1	-	-	2	-	-	-	#	1		#	4	10,000	4,444	
Refuse Bins 1000l capacity (wheelie Rollers); 2 free wheeling castors with brakes; 500kg capacity; 1260mm x 1305 x 772mm; black.	Health & Staff Welfare	4	-	-	4	-	-	1	#	4	1	#	14	4,000	6,222	each
High Pressure Cleaning 150bar; 10.0l/min max; 2.9kw;	Health & Staff Welfare	1	-	-	2	-	-	-	#	1	-	#	4	5,000	2,222	each
Rubbermaid Yellow Safety Floor Sign 11w x 1-1/2d x 25h	Health & Staff Welfare	4	-	-	4	-	-	2	#	4	2	#	16	500	889	
Safety signage Awaiting final selection	Health & Staff Welfare	1	1	1	2	-	1	17	1	1	1	#	26	1,000	2,889	
Hand protection awaiting final selection of Gloves	Health & Staff Welfare	35	-	-	30	-	2	7	2	20	4	#	100	30	333	
Foot protection Awaiting final selection of shoes	Health & Staff Welfare	35	-	-	30	-	2	7	2	20	4	#	100	700	7,778	
Protective ClothingAwaiting final selection	Health & Staff Welfare	35	-	-	30	-	2	7	2	20	4	#	100	150	1,667	
High visibility wear Awaiting final selection	Health & Staff Welfare	-	-	-	-	-	-	-	#	-	-	#	-	100	-	
Fridge L	Health & Staff Welfare	35	-	-	30		- 2	7	# 2	1 20	4	#	100	2.000	22,222	-
Industrial Locker 1800H x 410W x 430D galvanized - single	Health & Staff Welfare	35	- 4	- 4	12	-	1	2	1	20	3	#	40	2,000 800	3,556	
Fire extinguisher Dry Chemical - 9kg Fire Extinguisher Water and Foam 5kg	Health & Staff Welfare	8	4	4	12	-	1	2	Ľ	5	3	#	40	600	2,667	
Oxygen racks??	nearth & Stall Wellare	۰	4	4	12	-	1		1	2	3	"	40	- 000	171.533	USD
Oxygenracks::			 											_	171,333	035
Lighting		Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ				
Roof Insulation		Υ	N	Υ	N	N	N	N	N	N	N	N				
Temperature Control		у	у	у	У	у	у	у	у	у	У	у				
Overhead fans																
Etractors																
Interior and exterior paint																
			L													
Total			1	1											129,533	ĺ

APPENDIX H: SITES VISITED AND KEY PERSONNEL CONTACTED

Name	Designation	Department
Mr. Amir Hossain	Director General Family Planning	DGFP
Dr. Zubayer Hussain	Country Program Director	SIAPS / MSH
Mr. Md. Abdullah	Senior Technical Advisor - Logistics	MSH / SIAPS
Mr. Md. Saiful Islam	Additional Director	Central Warehouse
Mr. Md. Azim Uddin	Technical Advisor - Logistics	MSH / SIAPS Central Warehouse
Mr. Abu Shah Jamal Molla	Technical Advisor - Logistics	MSH / SIAPS
Mr. Mohammed Hossain	Technical Advisor - Logistics	Khulna Regional Warehouse
Mr. Mian Abdul Kader	Technical Advisor - Logistics	Chittagong Regional Warehouse
Mr. Syed Ahammed Mostafa Al-min	Technical Advisor - Logistics	Sylhet Regional Warehouse
Mr. Abdullah Imam Khan	Senior Technical Advisor - Procurement	MSH / SIAPS
Fatema Samdani Roshn	Senior Technical Advisor - Procurement	MSH / SIAPS
Mr. Mahmudul Islam	Managing Director	Softworks Ltd
Mr. Ashraful Alam Mollah	Program Coordinator	MSH / SIAPS
Dr. Kamal Hossain	Technical Assistant - TB	MSH / SIAPS
Mahommed Akter Hossain	Finance & Admin Manager	MSH / SIAPS
Dr. A. T. M. Sanaul Bashar	Senior Technical Advisor – TB Program	MSH / SIAPS
Golam Kibria	Senior Technical Advisor	MIS
Mr. Md. Lutful Kibria	Supply Officer in Charge	Regional Warehouse Tangail
Prieth Wish Chandra Buse	Pharmacist	RWH Tangail
Mahfuza Ahmed	Upazila Family Planning Assistant	Family Planning Office
Dilara Islam	Regional Supplies Officer	RWH Khulna
Abul Khair Sheikh	Store Keeper	RWH Khulna
Dilara Islam	Upazila Family Planning Officer	Rupsha Health Complex
Mr. Md. Shahidul Islam	Upazila Family Planning Assistant	Rupsha
Mohammed Abul Kalam	Assistant Director – Port Clearance	RWH Family Planning Chittagong
Mahamad Shil Alem	Regional Supplies Officer	Chittagong
K. M. Faruk Hossain	Store Keeper	RWH Family Planning Chittagong
Emran Hossain	Upazila Family Planning Officer	Boalkhali
Dipankar Rudra	Upazila Family Planning Assistant	Boalkhali
Rupam Ghosh	Upazila Family Planning Assistant	Boalkhali